



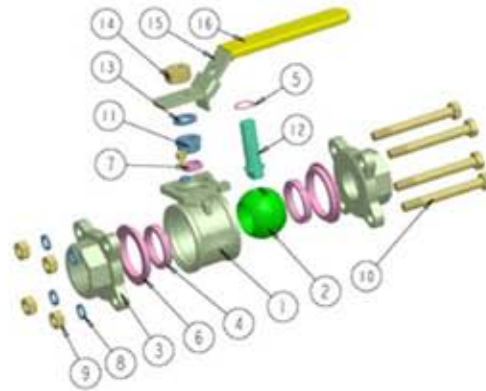

3 Pc. Screwed End AISI 316 Ball Valve

1000PSI

(DESIGN STANDARD) : ASME B16.34 GB/T12237
 (TEST&INSPECTION): API598 JB/T9092

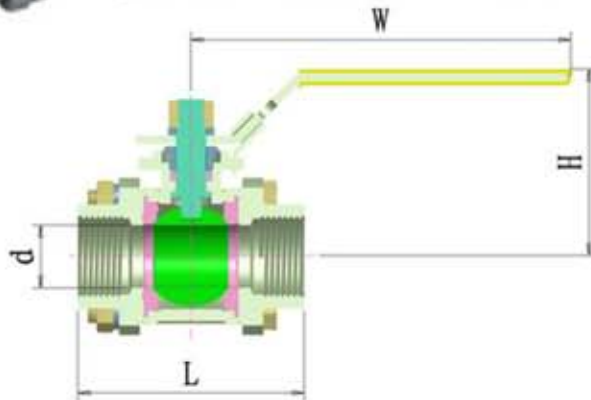

(MAIN PARTS MATERIALS) :

| No | Part Name | Material | |
|----|---------------|----------|-------|
| 1 | BODY | CF8M | WCB |
| 2 | BALL | SS316 | SS304 |
| 3 | CAP | CF8M | WCB |
| 4 | SEAT | PTFE | PTFE |
| 5 | THRUST WASHER | PTFE | PTFE |
| 6 | JOINT GASKET | PTFE | PTFE |
| 7 | PACKING | PTFE | PTFE |
| 8 | SPRING WASHER | SS304 | SS304 |
| 9 | NUT | A2-70 | A2-70 |
| 10 | BOLT | A2-70 | A2-70 |
| 11 | GLAND | SS304 | SS304 |
| 12 | STEM | SS316 | SS304 |
| 13 | SPRING WASHER | SS304 | SS304 |
| 14 | NUT | A2-70 | A2-70 |
| 15 | HANDLE | SS201 | SS201 |
| 16 | HANDLE COVER | PVC | PVC |

(MAIN SIZE):

(UNIT): mm

| Size | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2" | 2-1/2" | 3" | 4" |
|------|------|------|------|------|-----|--------|--------|-------|--------|-----|-----|
| d | 11.6 | 12.5 | 15 | 20 | 25 | 32 | 38 | 50 | 65 | 80 | 100 |
| L | 67 | 67 | 73 | 82.5 | 88 | 111 | 120 | 143.8 | 172.6 | 203 | 241 |
| H | 54 | 54 | 58.5 | 65.5 | 74 | 90 | 96 | 104.7 | 122 | 128 | 156 |
| W | 100 | 100 | 130 | 130 | 165 | 165 | 190 | 190 | 250 | 250 | 325 |

Note: The above technical data are just for your reference only any questions, please contact us.